

i3TOUCH X.ONE

iBTOUCH X-ONE Interactive performance.

The most performative high-end i3TOUCH display yet. The i3TOUCH X-ONE works faster than any interactive display you've seen before.

Everything you need is already on board the i3TOUCH X-ONE with i3STUDIO. i3STUDIO is the free out-of-the-box software suite that lets you share your content, give a killer presentation, whiteboard on your infinite canvas or annotate directly in your browser and presentation. We thought of everything so you don't have to.

Go straight to the stuff that matters most. Android 11 is optimized for how you use your i3TOUCH X-ONE, which gives you powerful device controls and easier and faster ways to get the job done.






86"

Powered by Android 11



Work at the speed of thought.

The i3TOUCH X-ONE has the power and speed to keep you going. Featuring Android 11 and 8GB of RAM optimized for how you use your i3TOUCH, you have powerful device controls, and easier and faster ways to present, navigate and so much more right at your fingertips.

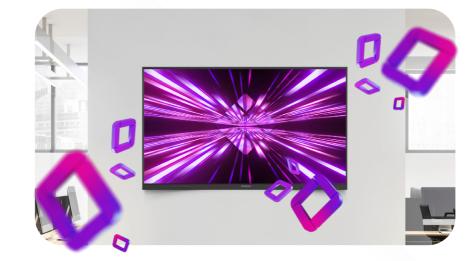



Irresistible touch & image quality.

A natural touch and writing experience are our top priorities. Thanks to the optical bonding technology we are able to achieve a pen-to-paper feeling. Of course, we incorporated an eraser and writing side to the pen for convenient, intuitive writing. Enjoy more vibrant colors and sharper lines with an outstanding 4K resolution.



i3STUDIO

m

WHITEBOARD

Free software included.

Our interactive displays are powered by i3STUDIO - our free, preinstalled software suite which includes: whiteboard, annotate, wireless presenting, video conferencing.

i3STUDIO gives you access to your favorite apps and internet browser with just **one** touch on the intuitive interface. With a state-of-the-art OTA (Over-The-Air) platform, you can be sure your device is always up to date with the latest firmware. All of this is included in i3STUDIO with free updates, forever.

Ø R ANNOTATE CONFERENCE = OPS BROWSE

PRESENT



Full stack for

great performance

i3STUDIO is built on completely new

and future-proof technical architecture

with improved management capabilities

including: notification and messaging

system, integrated support, and OTA

updates.



Go-to apps at your fingertips

The apps you rely on daily are available on i3STORE. Using the secure environment you can browse, install, update, and keep track of your apps on i3STUDIO. PowerPoint, Word, Zoom, digital signage, and more.

Plug into the possibilities.

Use the interactive display's speakers and camera by connecting your laptop to the screen with a USB-C cable. Just one cable for audio, video, power, and touch. Enjoy having access to all the tools connected to the display, such as the webcam or mic, straight from your laptop.

i3TOUCH X-ONE Powered by i3STUDIO





Free lifelong updates

Forever-free automatic updates. No subscription fees, hassle-free updates, and one seamless updating process - all Over-The-Air. You will always use the latest software version even if you bought your device years ago.



i3TOUCH X-ONE Compatible products & Accesoires





Manage, maintain, and monitor your fleet of interactive displays from anywhere at any time.



The i3CAIR Air Quality Sensor can monitor the air quality of your workspace or classroom and trigger alerts when rooms need to be ventilated.





i3CAMERA PRO

4K video conferencing camera with wide 120° angle, omnidirectional microphone and low light support.

Work faster

Take advantage of the advanced engine because the more powerful and updated your processor, the faster your display can complete its tasks. By getting a more powerful processor, it can

Multi-function button Define your favorite actions on a hardware button.

You can set it to freeze the image, take a screenshot switch to your preferred video input source and

09:45 🖻 🛃 🔔 <u>e</u> 5

i3STUDIO

b

<u>II</u>



Just one cable

Use the i3TOUCH display's speakers and camera by connecting your laptop to the screen with a USB-C cable. There are even two USB-C inputs. One for audio, video, power and touch, and one for audio,

DISPLAY PROPERTIES

	65"	75″	86"
Model Name	i3TOUCH X-ONE 65	i3TOUCH X-ONE 75	i3TOUCH X-ONE 86
Product series	i3TOUCH X-ONE Series - Interactive Digital \	Whiteboard Displays	· · · · · · · · · · · · · · · · · · ·
Product ID	10010312	10010313	10010314
ISPLAY SPECIFICATI	IONS	·	
Display technology	Liquid Crystal Display (LCD) with Direct-LED) backlight	
Panel Type	IPS-ADS		
Display aspect ratio	16:9		
Display native resolution	3840 x 2160 pixels - 4K Ultra High Definition	1	
Brightness (typical)	400 cd/m ²		
Brightness (maximum)	450 cd/m ²		
Contrast ratio (typical)	1200:1		
Dynamic contrast ratio	4000:1		
Viewing angle	178° / 178°		
Colour depth	1.07 billion colors (10 bit)		
Response time (typ.)	8 ms		
Refresh rate	60 Hz (@ UHD)		
Pixel pitch	0.372 x 0.372 mm	0.429 x 0.429 mm	0.4935 x 0.4935 mm
Glass	2.7 mm Hardened Anti-Reflection Safety Gla	ass (MOHS 7)	
Panel MTBF	50,000 hours		
Panel-Glass Bonding	Optical bonding (no air gap)		
Sensors	Ambient Light Sensor, Motion Sensor		
Supported Orientation	Landscape		

	65"	75"	86"
Model Name	i3TOUCH X-ONE 65	i3TOUCH X-ONE 75	i3TOUCH X-ONE 86
Product series	i3TOUCH X-ONE Series - Interactive Digital V	Vhiteboard Displays	
Product ID	10010312	10010313	10010314
PLAY SPECIFICATI	ONS		
Display technology	Liquid Crystal Display (LCD) with Direct-LED	backlight	
Panel Type	IPS-ADS		
Display aspect ratio	16:9		
Display native resolution	3840 x 2160 pixels - 4K Ultra High Definition	1	
Brightness (typical)	400 cd/m ²		
Brightness (maximum)	450 cd/m ²		
Contrast ratio (typical)	1200:1		
Dynamic contrast ratio	4000:1		
Viewing angle	178° / 178°		
Colour depth	1.07 billion colors (10 bit)		
Response time (typ.)	8 ms		
Refresh rate	60 Hz (@ UHD)		
Pixel pitch	0.372 x 0.372 mm	0.429 x 0.429 mm	0.4935 x 0.4935 mm
Glass	2.7 mm Hardened Anti-Reflection Safety Gla	ass (MOHS 7)	
Panel MTBF	50,000 hours		
Panel-Glass Bonding	Optical bonding (no air gap)		
Sensors	Ambient Light Sensor, Motion Sensor		
Supported Orientation	Landscape		

i3TOUCH X-ONE Product specs







斑

Room filling audio

The advanced audio system pumps out loud and full-bodied sound that is capable of filling a whole room. It handles lows, mids, and highs with competence, thanks to the integrated subwoofer. Just enjoy the premium audio during your presentation of



Supports split-screen mode allowing you to I3TOUCH X-ONE.



Optical Bonding provides many benefits including, enhanced clarity and viewability, ruggedization, improved heat dissipation and the most accurate



Reduced eye fatigue

With DC Dimming mode, a blue light filter, and an anti-glare coating, the i3TOUCH X-ONE offers an best-in- class viewing experience that tremendously reduces eye fatigue. Certified by TüVRheinland.

🚸 i3-TECHNOLOGIES

CONNECTIVITY

Digital audio-video input	2x HDMI 2.0, incl CEC, ARC
	1x DisplayPort 1.2
Digital audio-video-data ports	1x USB 3.0 Type C, incl PowerDelivery 60W charging, Alternate Mode DP, and USB data
	1x USB 3.0 Type C, incl Alternate Mode DP, and USB data
Digital audio-video output	1x HDMI 2.0
Digital audio output	1x S/PDIF Optical
USB Data ports	2x USB 3.0 Type A (switching via touch input)
	1x USB 3.0 Type A (Android)
Integrated OPS slot	OPS-PC slot (JAE TX24 connector) UHD
Control input	COM DE-9 (RS-232 standard)
Network	2x LAN: RJ-45 connector (1000 Mbit/sec)
Network connectivity	Wi-Fi 5 = 802.11ac
Analog audio output	1x Audio Jack 3.5 mm TRS

OPERATIONAL SPECIFICATIONS

Operating System	Android 11
	CPU : ARM A73 (4 cores) + A53 (4 cores)
	Clock speed : 2.8 GHz
	Cores : 8
Architecture	GPU : Mali G52
	RAM : 8 GB DDR4
	ROM : 32 GB
	Technology: V-Sense Infrared Touch recognition
	Resolution : 32768 x 32768
	Accuracy : 1 mm
Interactive touch	Response time : < 10 ms
	Connection : 3x USB-B 3.0
	Connection protocol: HID (Human Interface Device)
	Touch Points: 40 simultaneous multi-touch points
Maximum Daily Operating	18 hours / day
hours	
Loudspeakers	2x 20 Watt
Subwoofer	15 Watt

PHYSICAL PROPERTIES

Product Dimensions	1518 x 905 x 115 mm	1740 x 1030 x 115 mm	1986 x 1169 x 115 mm
VESA Mounting Pattern	600x400	800x400	800x400
Net Product Weight	40 kg	51 kg	65 kg
Packaging Dimensions	1640 x 221 x 1036 mm	1859 x 227 x 1153 mm	2119 x 227 x 1270 mm
Gross Packaged Weigth	51 kg	67 kg	82 kg

WARRANTY

Standard Warranty	5 years
Extended Warranty	for education entities: 8 years (via registration) for corporate entities: 8 years (available for purchase)

ACCESSOIRES

	User Manual
	USB-C cable
Included	Remote Control
	HDMI Cable
	USB cable
	2x passive stylus
	Wall Mount

REGULATORY INFORMATION

Type Approval	CE, FCC
---------------	---------

SOFTWARE FEATURES

User Interface	i3STUDIO (Fully Customizable Launcher)
Whiteboarding Software	i3WHITEBOARD
Annotation Software	i3WHITEBOARD
Screencasting Software	i3ALLSYNC Wireless Presenting
Operating System	Android 11
Update Support	OTA (Over-the-Air)
Web Browser	Chromium
Support	Apple Airplay & Google Chromecast
Conferencing	Zoom, WebEx, or browser-based
App Store	i3STORE (ability to download and install apps)
Remote Support	Ability to offer remote assistance (requires i3RDM lid

ELECTRICAL PROPERTIES

Input Power	100 ~ 240 Volt - 50/60 Hz	
Power Consumption	133 Watt	150 Wa
Energy Saving Features	Auto-brightness adjustment by Ambient Light Senso	

ENVIRONMENTAL CONDITIONS

Operating Temperature	0° C to 40° C
Operating Humidity	10% to 90% RH non-condensing
Operating Maximum Altitude	-20° C to 40° C
Storage Temperature	10% to 90% RH non-condensing
Storage Humidity	5,000 meters




icense)		


/att	168 Watt
Dr	



i3TOUCH X-ONE Technical Drawings

X-ONE 65"

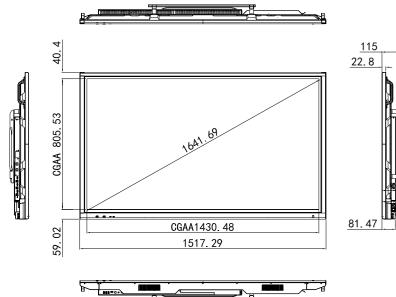




1168.93 CGAA1067.96 CGAA1897.04 59.87 1985.44 ŢĴ


Ji 16 188

___H

X-ONE 86"

X-ONE 75"

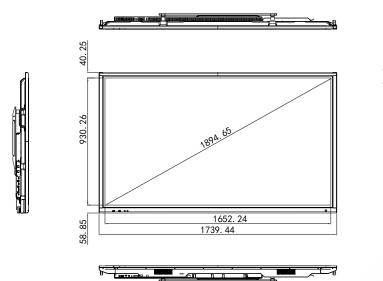


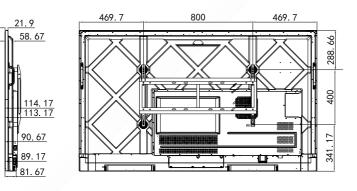




0



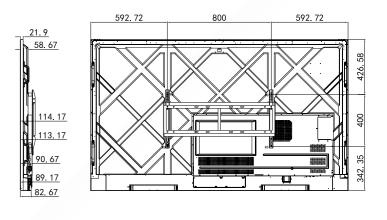





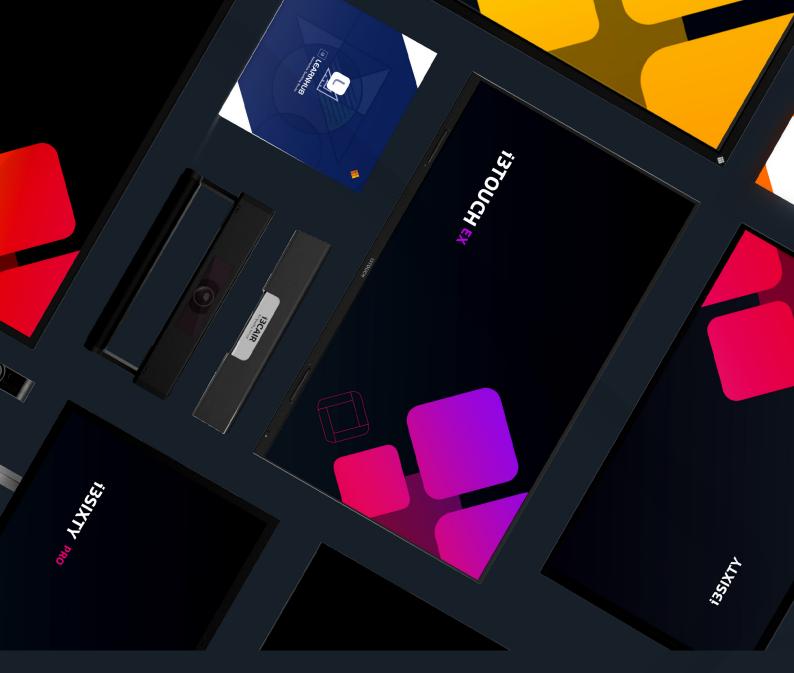

Like to know more?

i3-TECHNOLOGIES HQ Kleine Schaluinweg 7

3290 Diest Belgium

+32 56 31 34 15 info@i3-technologies.com



